


Performance Data

- MICRON RATING: 15.00 NOMINAL
- BETA RATING: N/A
- COLLAPSE PRESSURE RATING: N/A
- MAXIMUM TEMPERATURE: 250 F
- DIRECTION OF FLOW: OUTSIDE->IN
- RECOMMENDED CHANGEOUT DIFFERENTIAL PRESSURE: 20 PSID

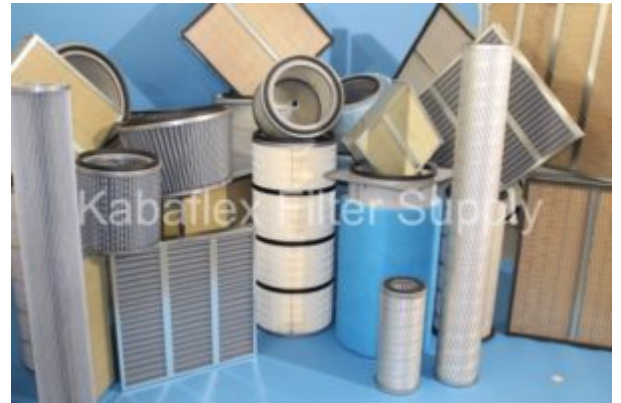

Dimensional Specifications

- (A) OUTER DIAMETER, TOP: 8.43 IN (214.12 MM)
- (B) OUTER DIAMETER, BOTTOM: 7.26 IN (184.40 MM)
- (C) INNER DIAMETER, TOP: 6.23 IN (158.24 MM)
- (D) INNER DIAMETER, BOTTOM: 0.67 IN (17.02 MM)
- (E) LENGTH: 17.73 IN (17.02 MM)
- (F) THREAD: NONE

Physical Specifications

- HANDLE: NONE
- SEAL MATERIAL: BUNA-N
- TYPE OF ADHESIVE: PLASTISOL
- TYPE OF ENDCAP: PLATED STEEL
- CENTER TUBE: PLATED STEEL
- TYPE OF MEDIA: PAPER
- FILTER AREA: SQ.IN.
- PLATING: NONE
- OUTER JACKET: YES – METAL
- CONFIGURATION: SINGLE OPEN END/BH

Packaging Specifications

- NUMBER PER CARTON: 1
- CARTON WEIGHT: 3.80 LB (1.72 KG)