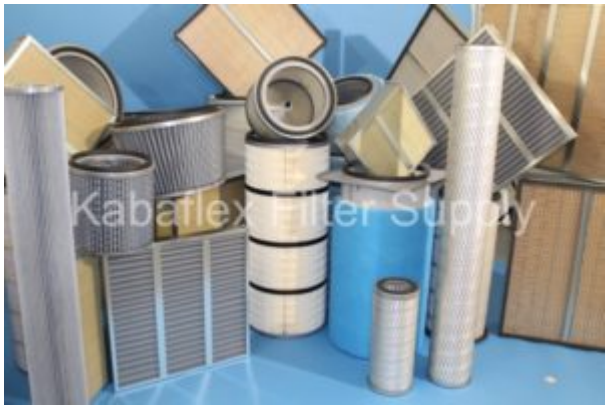

Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 275 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:6.00 IN (152.40 MM)
- (B) Outer Diameter, Bottom:6.00 IN (152.40 MM)
- (C) Inner Diameter, Top:3.50 IN (88.90 MM)
- (D) Inner Diameter, Bottom:3.50 IN (88.90 MM)
- (E) Length:8.00 IN (88.90 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:NONE
- Type of Adhesive:EPOXY
- Type of Endcap:PLATED STEEL
- Center Tube:PLATED STEEL
- Type of Media:PAPER
- Filter Area:12 SQ.FT.Plating:ELECTROTIN PLATED
- Outer Jacket:YES – METAL
- Configuration:DOUBLE OPEN END

Packaging Specifications

- Number per Carton:12
- Carton Weight: 22.00 LB (9.98 KG)