


Performance Data

- Micron Rating:
- Beta Rating:
- Collapse Pressure Rating: 75 PSI
- Maximum Temperature: 275 F
- Direction of Flow:INSIDE->OUT
- Recommended Changeout Differential Pressure:20 PSID

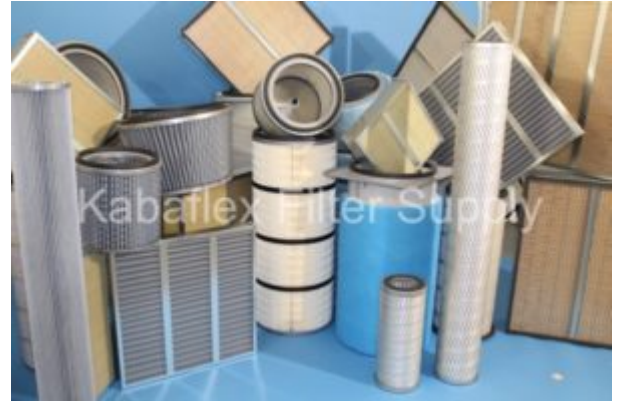

Dimensional Specifications

- (A) Outer Diameter, Top:4.50 IN (114.30 MM)
- (B) Outer Diameter, Bottom:4.50 IN (114.30 MM)
- (C) Inner Diameter, Top:3.13 IN (79.50 MM)
- (D) Inner Diameter, Bottom:3.13 IN (79.50 MM)
- (E) Length:24.00 IN (79.50 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:POLYURETHANE
- Type of Endcap:CARBON STEEL
- Center Tube:SPRIAL CARBON STEEL
- Type of Media:SYNTHETIC
- Filter Area:SQ.IN.Plating:N/A
- Outer Jacket:YES
- Configuration:DOUBLE OPEN END

Packaging Specifications

- Number per Carton:4
- Carton Weight: 11.00 LB (4.99 KG)