


Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 275 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 25 PSID

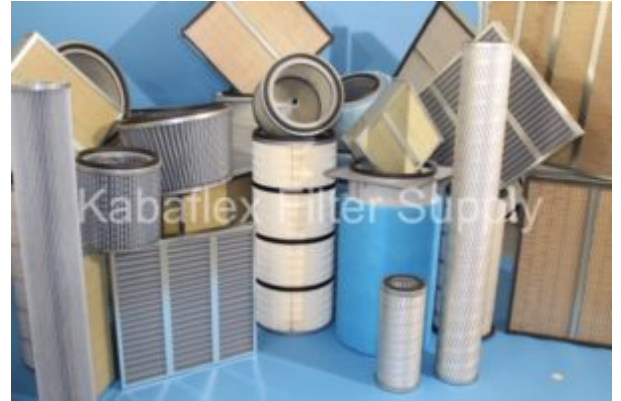

Dimensional Specifications

- (A) Outer Diameter, Top: 4.50 IN (114.30 MM)
- (B) Outer Diameter, Bottom: 4.50 IN (114.30 MM)
- (C) Inner Diameter, Top: 3.13 IN (79.50 MM)
- (D) Inner Diameter, Bottom: 3.13 IN (79.50 MM)
- (E) Length: 36.00 IN (79.50 MM)
- (F) Thread: NONE

Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: POLYURETHANE
- Type of Endcap: CARBON STEEL
- Center Tube: CARBON STEEL
- Type of Media: MICROGLASS
- Filter Area: SQ. IN. Plating: NONE
- Outer Jacket: NONE
- Configuration: DOUBLE OPEN END

Packaging Specifications

- Number per Carton: 4
- Carton Weight: 14.00 LB (6.35 KG)