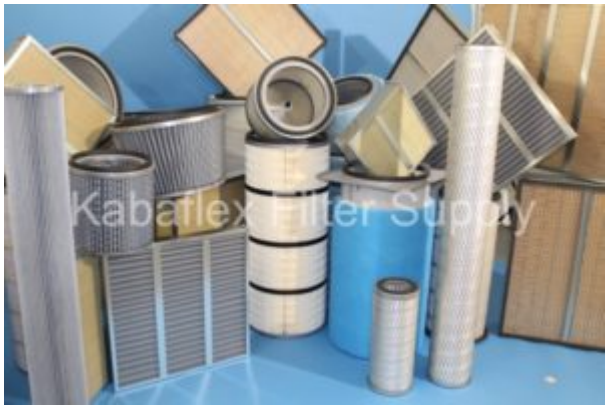


## Performance Data

- Micron Rating:
- Beta Rating:
- 50
- Collapse Pressure Rating: 45 PSID
- Maximum Temperature: 300 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

## Dimensional Specifications

- (A) Outer Diameter, Top:4.50 IN (114.30 MM)
- (B) Outer Diameter, Bottom:4.50 IN (114.30 MM)
- (C) Inner Diameter, Top:3.13 IN (79.50 MM)
- (D) Inner Diameter, Bottom:3.13 IN (79.50 MM)
- (E) Length:72.00 IN (79.50 MM)
- (F) Thread:NONE

## Physical Specifications

- Handle:NONE
- Seal Material:
- Type of Adhesive:POLYURETHANE
- Type of Endcap:CARBON STEEL
- Center Tube:CARBON STEEL
- Type of Media:FIBERGLASS
- Filter Area:7.06 SQ.FT.Plating:NONE
- Outer Jacket:NONE
- Configuration:

## Packaging Specifications

- Number per Carton:4
- Carton Weight: 28.00 LB (12.70 KG)