


Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating:
- Maximum Temperature: 300 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

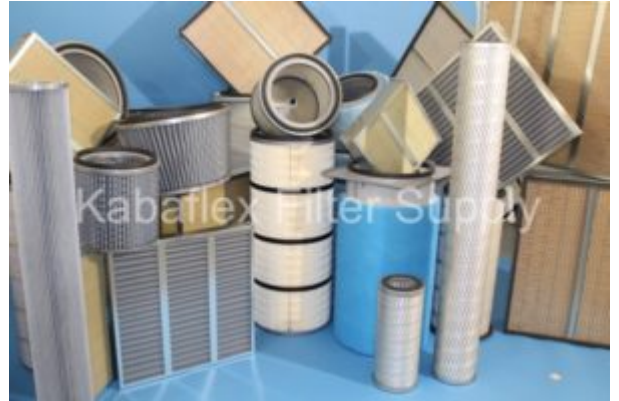

Dimensional Specifications

- (A) Outer Diameter, Top: 3.00 IN (76.20 MM)
- (B) Outer Diameter, Bottom: 3.00 IN (76.20 MM)
- (C) Inner Diameter, Top: 1.63 IN (41.40 MM)
- (D) Inner Diameter, Bottom: 1.63 IN (41.40 MM)
- (E) Length: 36.00 IN (41.40 MM)
- (F) Thread:

Physical Specifications

- Handle: NONE
- Seal Material:
- Type of Adhesive:
- Type of Endcap: PLATED STEEL
- Center Tube: PLATED STEEL
- Type of Media: WHITE COTTON
- Filter Area: SQ. IN. Plating:
- Outer Jacket: YES – SOCK
- Configuration: DOUBLE OPEN END

Packaging Specifications

- Number per Carton: 12
- Carton Weight: