
Performance Data

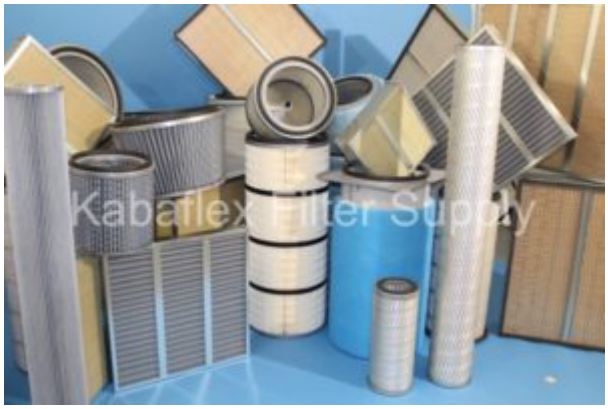

- Micron Rating:
- Beta Rating:
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 225 F
- Direction of Flow:OUTSIDE-IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:12.75 IN (323.85 MM)
- (B) Outer Diameter, Bottom:16.50 IN (419.10 MM)
- (C) Inner Diameter, Top:8.38 IN (212.85 MM)
- (D) Inner Diameter, Bottom:12.00 IN (304.80 MM)
- (E) Length:26.00 IN (304.80 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:
- Type of Endcap:PLATED STEEL
- Center Tube:EXPANDED METAL
- Type of Media:80/20 BLEND
- Filter Area:274 SQ.FT.Plating:GALVANIZED
- Outer Jacket:YES
- Configuration:DOUBLE OPEN END

Packaging Specifications

- Number per Carton:1
- Carton Weight: 22.00 LB (9.98 KG)