




## Performance Data

- Micron Rating:
- Beta Rating:
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 225 F
- Direction of Flow: OUTSIDE-IN
- Recommended Changeout Differential Pressure: 20 PSID

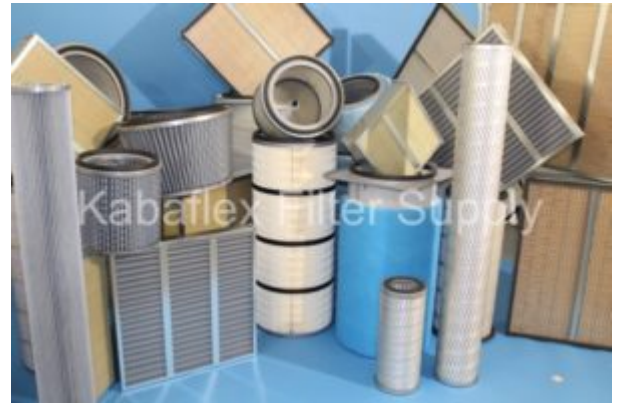

## Dimensional Specifications

- (A) Outer Diameter, Top: 12.75 IN (323.85 MM)
- (B) Outer Diameter, Bottom: 16.50 IN (419.10 MM)
- (C) Inner Diameter, Top: 8.38 IN (212.85 MM)
- (D) Inner Diameter, Bottom: 12.00 IN (304.80 MM)
- (E) Length: 26.00 IN (304.80 MM)
- (F) Thread: NONE

## Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive:
- Type of Endcap: PLATED STEEL
- Center Tube: EXPANDED METAL
- Type of Media: 80/20 BLEND
- Filter Area: 274 SQ.FT. Plating: GALVANIZED
- Outer Jacket: YES
- Configuration: DOUBLE OPEN END

## Packaging Specifications

- Number per Carton: 1
- Carton Weight: 22.00 LB (9.98 KG)