
Performance Data

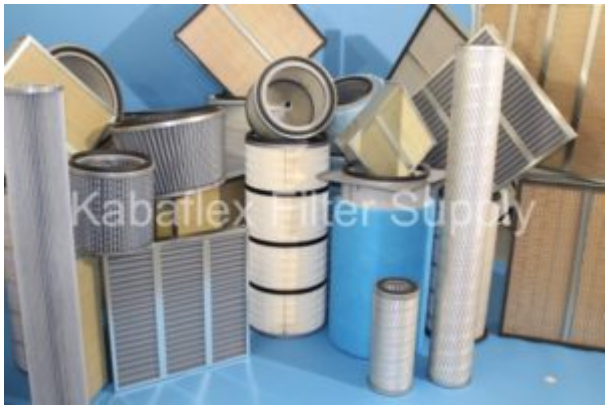

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 150 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:12.75 IN (323.85 MM)
- (B) Outer Diameter, Bottom:12.75 IN (323.85 MM)
- (C) Inner Diameter, Top:8.38 IN (212.85 MM)
- (D) Inner Diameter, Bottom:0.57 IN (14.48 MM)
- (E) Length:26.00 IN (14.48 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:PLASTISOL
- Type of Endcap:PLATED STEEL
- Center Tube:PLATED STEEL
- Type of Media:80/20 BLEND FR
- Filter Area:226 SQ.FT.Plating:ELECTRO-GALVANIZED
- Outer Jacket:YES – METAL
- Configuration:SINGLE OPEN END/BH

Packaging Specifications

- Number per Carton:1
- Carton Weight: 15.00 LB (6.80 KG)