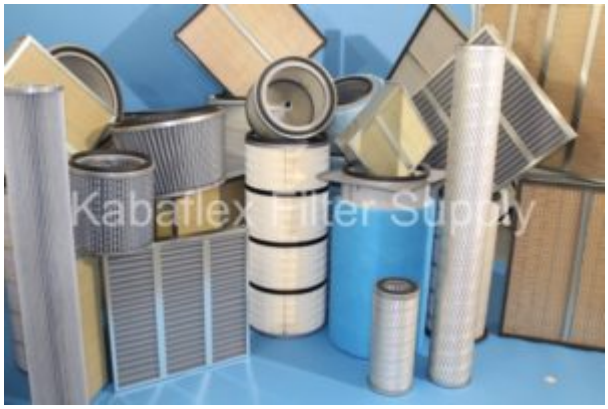


Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 150 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:13.81 IN (350.77 MM)
- (B) Outer Diameter, Bottom:13.81 IN (350.77 MM)
- (C) Inner Diameter, Top:9.50 IN (241.30 MM)
- (D) Inner Diameter, Bottom:9.50 IN (241.30 MM)
- (E) Length:27.50 IN (241.30 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:PLASTISOL
- Type of Endcap:PLATED STEEL
- Center Tube:PLATED STEEL
- Type of Media:80/20
- Filter Area:SQ.FT.Plating:ELECTRO-GALVANIZED
- Outer Jacket:YES – METAL
- Configuration:DOUBLE OPEN END

Packaging Specifications

- Number per Carton:1
- Carton Weight: 16.60 LB (7.53 KG)