Performance Data

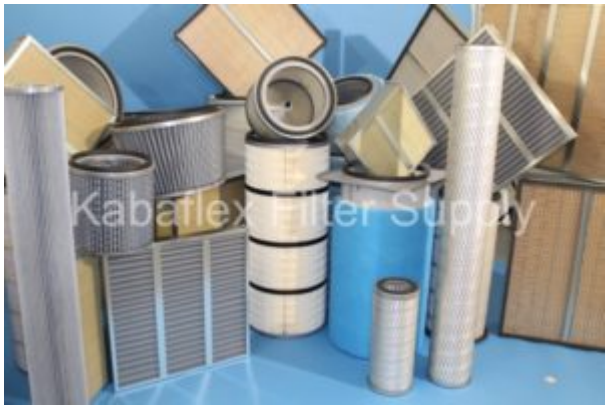

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 225 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:10.25 IN (260.35 MM)
- (B) Outer Diameter, Bottom:10.25 IN (260.35 MM)
- (C) Inner Diameter, Top:1.75 IN (44.45 MM)
- (D) Inner Diameter, Bottom:
- (E) Length:11.63 IN (0.00 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:POLYVINYLCHLORIDE
- Type of Endcap:PLATED STEEL
- Center Tube:PERFORATED METAL
- Type of Media:PAPER
- Filter Area:SQ.IN.Plating:ELECTROTIN PLATED
- Outer Jacket:NONE – NONE
- Configuration:

Packaging Specifications

- Number per Carton:1
- Carton Weight: 10.00 LB (4.54 KG)