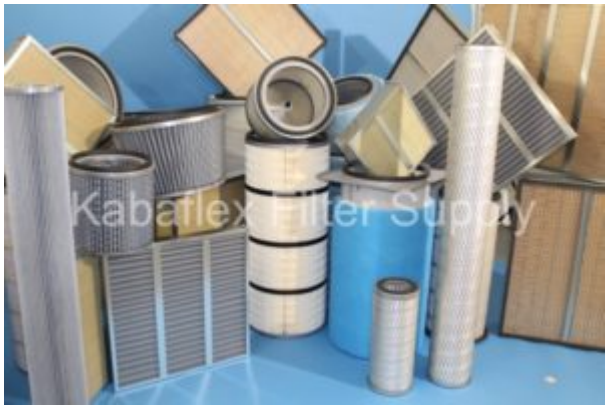

Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 275 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:4.50 IN (114.30 MM)
- (B) Outer Diameter, Bottom:4.50 IN (114.30 MM)
- (C) Inner Diameter, Top:3.25 IN (82.55 MM)
- (D) Inner Diameter, Bottom:3.25 IN (82.55 MM)
- (E) Length:36.00 IN (82.55 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:POLYURETHANE
- Type of Endcap:CARBON STEEL
- Center Tube:CARBON STEEL
- Type of Media:FIBERGLASS
- Filter Area:N/APlating:NONE
- Outer Jacket:YES
- Configuration:DOUBLE OPEN END

Packaging Specifications

- Number per Carton:4
- Carton Weight: 15.00 LB (6.80 KG)