


## Performance Data

- Micron Rating:
- Beta Rating:
- Collapse Pressure Rating:
- Maximum Temperature: 275 F
- Direction of Flow: OUTSIDE/IN
- Recommended Changeout Differential Pressure: 20 PSID

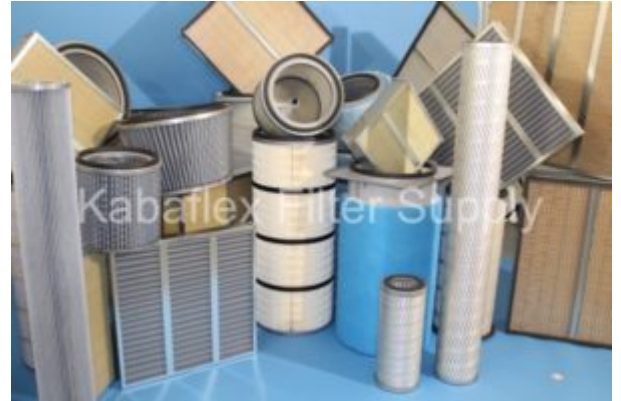

## Dimensional Specifications

- (A) Outer Diameter, Top: 3.30 IN (83.82 MM)
- (B) Outer Diameter, Bottom: 3.30 IN (83.82 MM)
- (C) Inner Diameter, Top: 2.14 IN (54.36 MM)
- (D) Inner Diameter, Bottom: 2.14 IN (54.36 MM)
- (E) Length: 36.00 IN (54.36 MM)
- (F) Thread: NONE

## Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: PVC
- Type of Endcap: TIN PLATED STEEL
- Center Tube: TIN PLATED STEEL
- Type of Media: MICROGLASS
- Filter Area: 3 SQ.FT. Plating:
- Outer Jacket: NONE
- Configuration: DOUBLE OPEN END

## Packaging Specifications

- Number per Carton: 4
- Carton Weight: 11.00 LB (4.99 KG)