


Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 45 PSI
- Maximum Temperature: 275 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

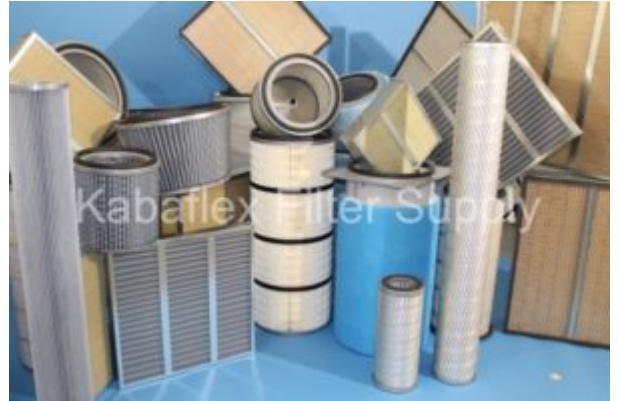

Dimensional Specifications

- (A) Outer Diameter, Top: 5.50 IN (139.70 MM)
- (B) Outer Diameter, Bottom: 5.50 IN (139.70 MM)
- (C) Inner Diameter, Top: 4.25 IN (107.95 MM)
- (D) Inner Diameter, Bottom: 0.63 IN (16.00 MM)
- (E) Length: 36.00 IN (914.40 MM)
- (F) Thread: NONE

Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: POLYURETHANE ADHESIVE
- Type of Endcap: STEEL
- Center Tube: STEEL
- Type of Media: MICROGLASS
- Filter Area: 50.00 SQ. IN. Plating: NONE
- Outer Jacket: NONE
- Configuration: SINGLE OPEN END

Packaging Specifications

- Number per Carton: 4
- Carton Weight: 23.00 LB (10.43 KG)