


Performance Data

- Micron Rating: 15.00 NOMINAL
- Beta Rating: N.A.
- Collapse Pressure Rating: NOT RATED
- Maximum Temperature: 300 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

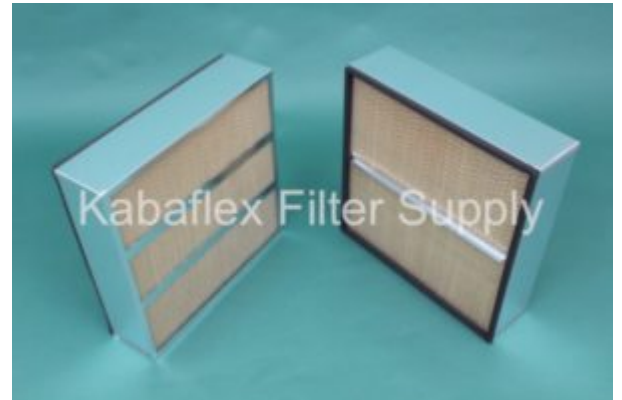

Dimensional Specifications

- (A) Outer Diameter – Top: 19.25 IN (488.95 MM)
- (B) Outer Diameter – Bottom: 19.25 IN (488.95 MM)
- (C) Inner Diameter – Top:
- (D) Inner Diameter – Bottom:
- (E) Length: 19.38 IN (0.00 MM)
- (F) Thread: NONE

Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: EPOXY
- Type of Endcap: GALVANIZED STEEL
- Center Tube: NONE
- Type of Media: PAPER
- Filter Area: 71 SQ.FT.
- Plating: GALVANIZED
- Outer Jacket: YES
- Configuration: N/A

Packaging Specifications

- Number per Carton: 1
- Carton Weight: 13.00 LB (5.90 KG)