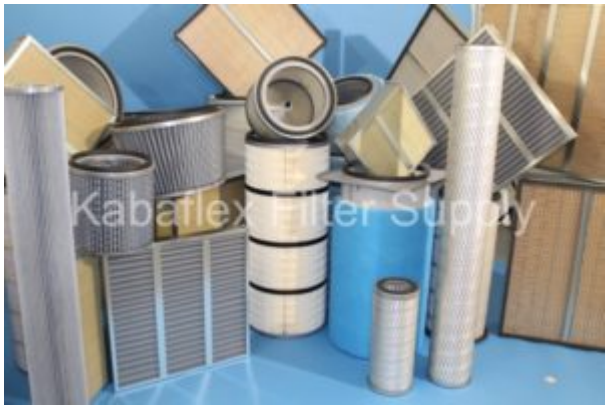

Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 100 PSID
- Maximum Temperature: 225 F
- Direction of Flow:OUTSIDE->IN
- Recommended Changeout Differential Pressure:20 PSID

Dimensional Specifications

- (A) Outer Diameter, Top:2.63 IN (66.80 MM)
- (B) Outer Diameter, Bottom:2.63 IN (66.80 MM)
- (C) Inner Diameter, Top:1.06 IN (26.92 MM)
- (D) Inner Diameter, Bottom:1.06 IN (26.92 MM)
- (E) Length:9.75 IN (26.92 MM)
- (F) Thread:NONE

Physical Specifications

- Handle:NONE
- Seal Material:BUNA-N
- Type of Adhesive:EPOXY
- Type of Endcap:PLATED STEEL
- Center Tube:PLATED STEEL
- Type of Media:PAPER
- Filter Area:5 SQ.FT.Plating:ELECTROTIN PLATED
- Outer Jacket:YES – METAL
- Configuration:DOUBLE OPEN END

Packaging Specifications

- Number per Carton:12
- Carton Weight: 6.40 LB (2.90 KG)