


Performance Data

- Micron Rating:
- Beta Rating:
- Collapse Pressure Rating:
- Maximum Temperature: 225 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

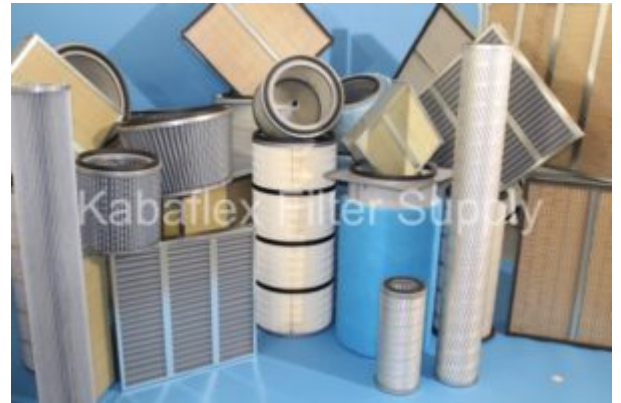

Dimensional Specifications

- (A) Outer Diameter, Top: 2.63 IN (66.80 MM)
- (B) Outer Diameter, Bottom: (C) Inner Diameter, Top: 1.06 IN (26.92 MM)
- (D) Inner Diameter, Bottom:
- (E) Length: 19.75 IN (0.00 MM)
- (F) Thread:

Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive:
- Type of Endcap: PLATED STEEL
- Center Tube: PLATED STEEL
- Type of Media: PAPER
- Filter Area: SQ. IN. Plating: ELECTROTIN PLATED
- Outer Jacket: NONE
- Configuration:

Packaging Specifications

- Number per Carton: 15
- Carton Weight: 21.00 LB (9.53 KG)