




## Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 150 PSID
- Maximum Temperature: 225 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

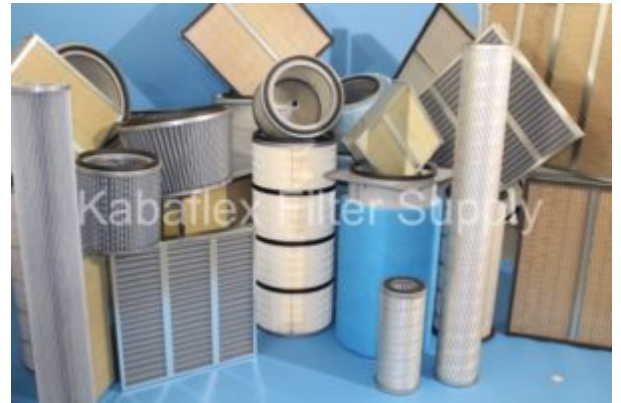

## Dimensional Specifications

- (A) Outer Diameter, Top: 3.88 IN (98.55 MM)
- (B) Outer Diameter, Bottom: 3.88 IN (98.55 MM)
- (C) Inner Diameter, Top: 1.63 IN (41.40 MM)
- (D) Inner Diameter, Bottom: 1.63 IN (41.40 MM)
- (E) Length: 9.30 IN (41.40 MM)
- (F) Thread: NONE

## Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: POLYVINYLCHLORIDE
- Type of Endcap: PLATED STEEL
- Center Tube: PLATED STEEL
- Type of Media: PAPER
- Filter Area: SQ. IN. Plating: ELECTROTIN PLATED
- Outer Jacket: YES – METAL
- Configuration: DOUBLE OPEN END

## Packaging Specifications

- Number per Carton: 12
- Carton Weight: 17.00 LB (7.71 KG)