


## Performance Data

- Micron Rating: 5.00 NOMINAL
- Beta Rating: N/A
- Collapse Pressure Rating: 100 PSID
- Maximum Temperature: 225 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

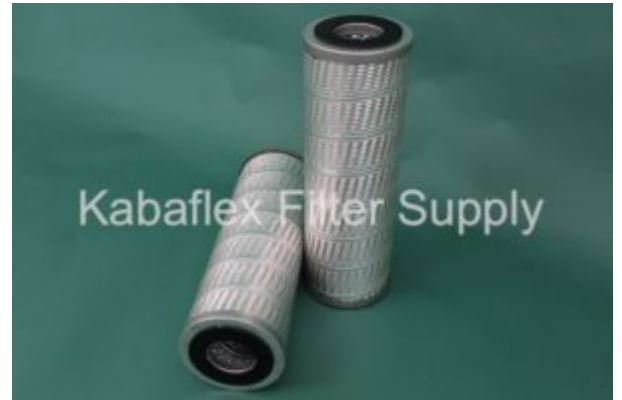

## Dimensional Specifications

- (A) Outer Diameter, Top: 6.00 IN (152.40 MM)
- (B) Outer Diameter, Bottom: 6.00 IN (152.40 MM)
- (C) Inner Diameter, Top: 3.50 IN (88.90 MM)
- (D) Inner Diameter, Bottom: 3.50 IN (88.90 MM)
- (E) Length: 18.00 IN (88.90 MM)
- (F) Thread: NONE Physical Specifications
- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: EPOXY
- Type of Endcap: PLATED STEEL
- Center Tube: PLATED STEEL
- Type of Media: PAPER
- Filter Area: 34 SQ.FT.
- Plating: ELECTROTIN PLATED
- Outer Jacket: YES – METAL
- Configuration: DOUBLE OPEN END

## Packaging Specifications

- Number per Carton: 6
- Carton Weight: 23.00 LB (10.43 KG)