


Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSI
- Maximum Temperature: 275 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 25 PSID

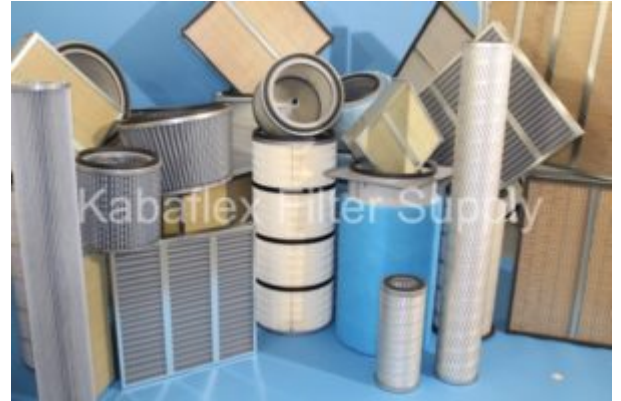

Dimensional Specifications

- (A) Outer Diameter, Top: 3.50 IN (88.90 MM)
- (B) Outer Diameter, Bottom: 3.50 IN (88.90 MM)
- (C) Inner Diameter, Top: 2.10 IN (53.34 MM)
- (D) Inner Diameter, Bottom: 2.10 IN (53.34 MM)
- (E) Length: 24.00 IN (53.34 MM)
- (F) Thread:

Physical Specifications

- Handle: NONE
- Seal Material: BUNA
- Type of Adhesive: POLYURETHANE
- Type of Endcap: PLATED STEEL
- Center Tube: N/A
- Type of Media: MICROGLASS
- Filter Area: SQ. IN. Plating: N/A
- Outer Jacket: YES
- Configuration: DOUBLE OPEN END

Packaging Specifications

- Number per Carton: 4
- Carton Weight: 8.00 LB (3.63 KG)