




Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 225 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 25 PSID

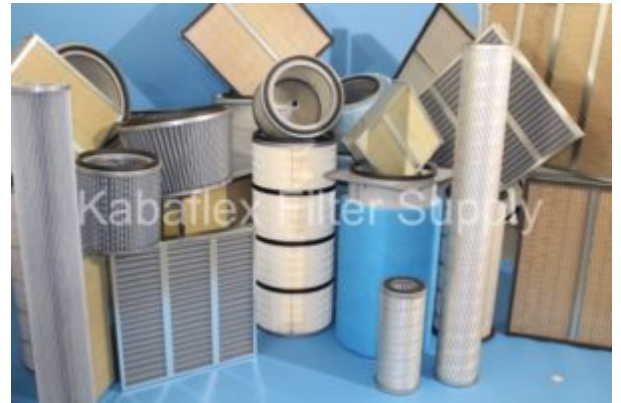

Dimensional Specifications

- (A) Outer Diameter, Top: 4.13 IN (104.90 MM)
- (B) Outer Diameter, Bottom: (C) Inner Diameter, Top: 1.19 IN (30.23 MM)
- (D) Inner Diameter, Bottom: 1.31 IN (33.27 MM)
- (E) Length: 12.63 IN (320.75 MM)
- (F) Thread: NONE

Physical Specifications

- Handle: NONE
- Seal Material: NONE
- Type of Adhesive: NONE
- Type of Endcap: PLATED STEEL
- Center Tube: PLATED STEEL
- Type of Media: COTTON
- Filter Area: 5.0 SQ. IN. Plating: NONE
- Outer Jacket: YES – SOCK
- Configuration: DOUBLE OPEN END

Packaging Specifications

- Number per Carton: 1
- Carton Weight: 24.00 LB (10.89 KG)