


## Performance Data

- Micron Rating:
- Beta Rating:
- N/A
- Collapse Pressure Rating: 75 PSID
- Maximum Temperature: 225 F
- Direction of Flow: OUTSIDE->IN
- Recommended Changeout Differential Pressure: 20 PSID

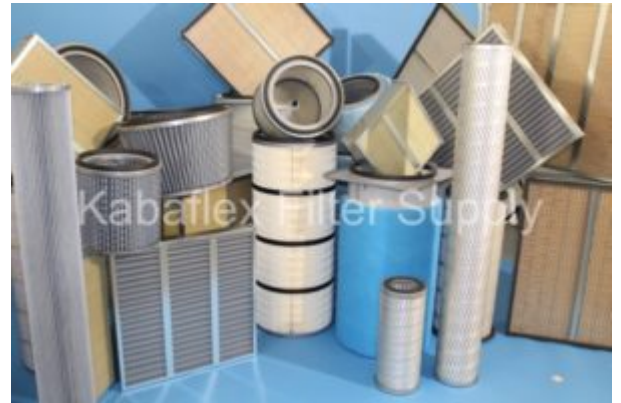

## Dimensional Specifications

- (A) Outer Diameter, Top: 3.66 IN (92.96 MM)
- (B) Outer Diameter, Bottom: 3.66 IN (92.96 MM)
- (C) Inner Diameter, Top:
- (D) Inner Diameter, Bottom:
- (E) Length: 3.70 IN (93.98 MM)
- (F) Thread: 42433

## Physical Specifications

- Handle: NONE
- Seal Material: BUNA-N
- Type of Adhesive: PLASTISOL
- Type of Endcap: PLATED STEEL
- Center Tube: PLATED STEEL
- Type of Media: PAPER
- Filter Area: 5.0 SQ. IN. Plating: ELECTROTIN PLATED
- Outer Jacket: YES
- Configuration: SINGLE OPEN END

## Packaging Specifications

- Number per Carton: 12
- Carton Weight: 12.90 LB (5.85 KG)